


### BAS-5340 TVJET

### VHF / UHF INDOOR TV ANTENNA

- VHF / UHF TV antenna optimized for digital broadcasting reception
- Equipped with advanced low-noise amplifier, and provides high-quality image
- UHF high gain and directivity due to log-periodic structure
- Full-assembled for easy installation
- Four versions of each model:  
 "5V" - amplified, antenna powering through the antenna socket of the digital converter box (STB)  
 "USB" - amplified, antenna powering from any USB port using the injector  
 "DX" - amplified, antenna powering from its own power supply connected to the mains electricity AC 110..230V
- Two options of a TV-set connector in complete set:  
 F-connector for North America  
 TV-plug (TV aerial connector) for other territories

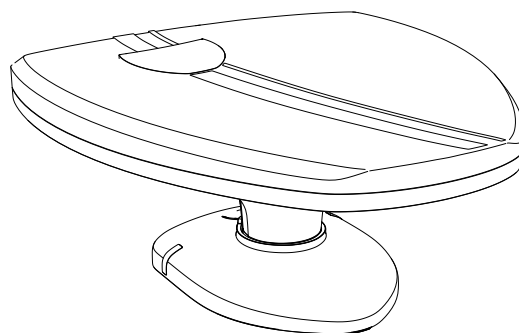

### Specifications

Model	BAS-5340-5V	BAS-5340-USB	BAS-5340-DX
Total no of Elements	16 (log-periodic structure)		
Junction Box	Cable with F-male or TV-plug connector mounted on PCB in ABS case		
Frequency range	Wideband 175 – 230MHz (VHF Ch6 – 12) & 470 - 860MHz (UHF Ch21 – 69); Stop-band 880-920MHz		
Forward Gain VHF/UHF (peak)	3dBi/8dBi		
Input Impedance	75 Ohm		
Amplifier Gain VHF/UHF (peak)	32dB/37dB		
Supply Voltage	DC 5V		DC 5..12V
Type	With amplifier in the case		
Installation methods	Can be placed on the upper plane of the TV or on vertical or horizontal suitable surface or on-wall		
Weight	0.18kg		
Dimension L x H x W	210mm x 40mm x 20mm		
Element material	0.3 mm tinplate elements		
Construction Material	ABS		
Packaging	Individual carton 315mm x 75mm x 40mm / Outer carton contains 20 pieces		
Gross (Individual /Outer)	0.24kg / 4.8 kg		

### Ordering Options

BAS-5340-5V	Amplified, with cable, TV-plug
BAS-5340-USB	Amplified, with cable, USB power injector with TV-plug
BAS-5340-DX	Amplified, with cable, USB power injector with TV-plug, power supply AC 100..230V / DC 5V
BAS-5340-5V-F	Amplified, with cable, F-connector
BAS-5340-USB-F	Amplified, with cable, USB power injector with F-connector
BAS-5340-DX-F	Amplified, with cable, USB power injector with F-connector, power supply AC 100..230V / DC 5V

*In the interests of continued product development & improvement, SEMZ REMO LLC reserves the right to change product specifications, design & dimensions without notice.  
 Data correct at time of going to press 08/02/2018*