

BAS-X1174 MIDI

UHF TV ANTENNA FOR SUBURBAN AREAS OR LONG RANGE

Tuned 470-860MHz (Ch21 – 69) and filtered to reject 4G

- High Gain and Directivity with large reflector

- 15mm boom section for strength and rigidity

- Part pre-assembled for "No-tools" assembly

- Four versions of each model:

"P" - passive, antenna does not require power

"5V" - amplified, antenna powering through the antenna socket of the digital converter box (STB)

"USB" - amplified, antenna powering from any USB port using the injector


"DX" - amplified, antenna powering from its own power supply connected to the mains

electricity AC 110..230V

- Two options of a TV-set connector in complete set:

F-connector for North America

TV-plug (TV aerial connector) for other territories

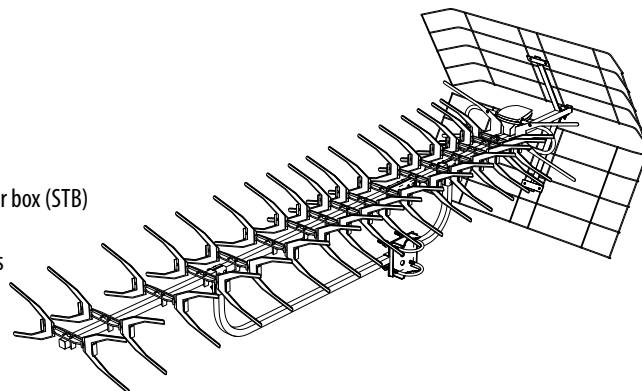

Specifications

Model	BAS-X1174-P	BAS-X1174-5V	BAS-X1174-USB	BAS-X1174-DX
Total no of Elements	74			
Junction Box	F-female connector mounted on PCB in clamshell ventilated weatherproof ABS moulding with cable entry grommet			
Frequency range	Wideband 470 - 860MHz : UHF Ch21 – 69 : Stop-band 880-920MHz			
Forward Gain (peak)	16dBi			
Front / Back Ratio at 630MHz (mid-band)	>25dB			
Cross Polar Rejection (typical)	> -20dB			
Input Impedance	75 Ohm			
Amplifier Gain (peak)	—	20dB		
Supply Voltage	—	DC 5V		DC 5..12V
Type	Passive	With amplifier in junction box		
Weight	2.14kg			
Dimension L x W x H	1545mm x 560mm x 570mm			
Boom sizes	15mm x 15mm aluminium central boom & 20mm x 1.5mm steel reflector boom			
Element material	1mm aluminium directors & 2mm steel wire reflectors			
Construction Material	Magnesium aluminium alloy for high strength & corrosion resistance			
Finish	Cleaned and bright aluminium & Galvanised Steel / Powder Polymer Coating Steel			
Clamp	Fixed clamp Heavy Duty Galvanised Steel up to 50mm			
Packaging	Individual carton 950mm x 305mm x 80mm / Outer carton contains 5 pieces			
Gross (Individual /Outer)	2.5 kg / 25.0 kg			

Ordering Options

BAS-X1174-P	Passive, w/o cable
BAS-X1174-5V	Amplified, w/o cable, TV-plug
BAS-X1174-USB	Amplified, w/o cable, USB power injector with TV-plug
BAS-X1174-DX	Amplified, w/o cable, USB power injector with TV-plug, power supply AC 100..230V / DC 5V
BAS-X1174-5V-F	Amplified, w/o cable, F-connector
BAS-X1174-USB-F	Amplified, w/o cable, USB power injector with F-connector
BAS-X1174-DX-F	Amplified, w/o cable, USB power injector with F-connector, power supply AC 100..230V / DC 5V

*In the interests of continued product development & improvement, SEMZ REMO LLC reserves the right to change product specifications, design & dimensions without notice.
Data correct at time of going to press 05/02/2018*